Le Grand Marché du Sol

TECHNICAL DATA SHEET EN

Issued 04-03-2026

SOLID WOOD FLOORING

Vienna 90 · lacquered

Applies to Leroy Merlin refs: 75377866

Product specifications

Solid parquet	EN 13226	DoP MAS2021
Size	Plank	90 × 300-1200 × 15 mm
	Box	8 planks / 0,864 m² / 10,53 kg
	Full planks	1
	Pallet	56 boxes / 48,384 m² / 524 kg
Density	EN 323	± 650 kg/m³
Installation		Tongue & Groove
Core		European oak (Quercus robur)
Grading		Rustic AB+
Texture		Slightly Brushed
Bevel		4V
Gloss level at 60°		5-7 %
Finishing		UV Lacquer
Warranty conditions	Residential warranty Commercial warranty	30 years upon request
Use class	EN 13226	Class 23, Class 33 Heavy commercial use

Product properties


PROPERTY	TEST METHOD	MIN. REQ.	RESULT
Indoor air certifications			REACH, A+
Reaction to fire	EN 13501-1		Cfl-s1
Slip resistance	CEN/TS 15676		USRV 63

PROPERTY	TEST METHOD	MIN. REQ.	RESULT
Formaldehyde emission	EN 717-1	≤ 0.124 mg/m³	E1
Pentachlorophenol content	CEN/TR 14823	< 5 ppm	Does not contain pentachlorophenol
Underfloor heating	EN 12664	R < 0.15 m²K/W	R= 0.09 m²K/W OK (max +28°C) + glued
Biological durability			Class 1

GRADING **Rustic AB+**

Grading description

Texture	Slightly Brushed
Grading	Rustic
Colour variation	Medium
Sound knots	Ø ≤ 50mm
Unsound knots	Ø ≤ 30mm
Sapwood	Max 1/3 of plank
End crack	Length max. of 5 cm; width 1 mm
Surface crack	Width 1 mm, no limit in length
Insect hole	Not allowed
Decay	Not allowed
Blue/yellow stain	Not allowed
Sound heart	Allowed
Machine marks	Not allowed

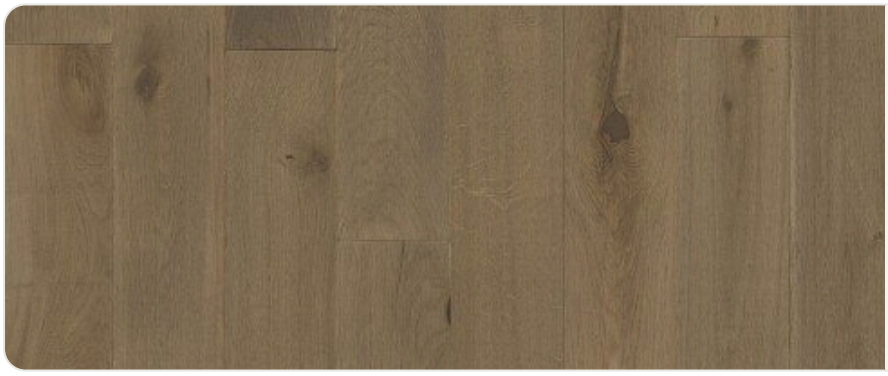

This picture is an indication of the grading as described.

Scale from (rigid) parquet without knots up to planks with more and larger knots

9 / 10

From little colour variation/sapwood to bigger colour variation/sapwood

7 / 10

Cleaning and maintenance instructions: legrandmarchedusol.com

CE
EN 14342

ÉMISSIONS DANS L'AIR INTÉRIEUR A+ A+ A B C

REACH COMPLIANCE